


## VD24 Modem Model: Huawei MT900


- **Front Panel**

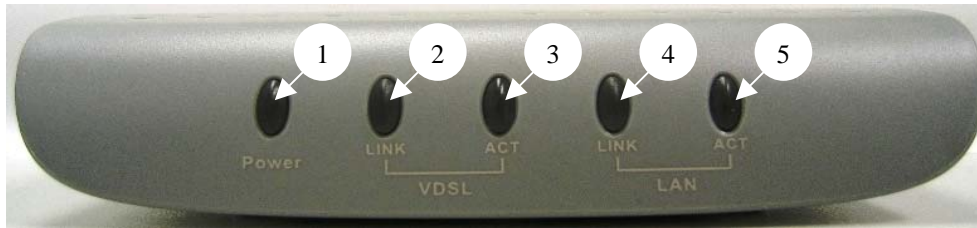

LED Indicator	Status	Description
1. Power	Steady green light	The unit is power on
2. VDSL LINK	Steady green light	A valid VDSL connection
3. VDSL ACT	Blinking green light	There is traffic over VDSL line
4. LAN LINK	Steady light	A valid LAN connection
	Green light	The speed of data transfer is 10Mbps
	Orange light	The speed of data transfer is 100Mbps
5. LAN ACT	Blinking green light	There is traffic over Ethernet

\* If the signal is abnormal, there might be a connection problem with the Modem. Please refer to the below picture (rear panel) and check whether the connections are secured between the Modem and your LAN card, then reset the Modem (re-establish a new connection) or turn off the Modem and restart your computer and see whether it resumes to normal operation. If the status Modem remains the same, please contact our 24-hour Customer Service Hotline at 1222.

- **Rear Panel**

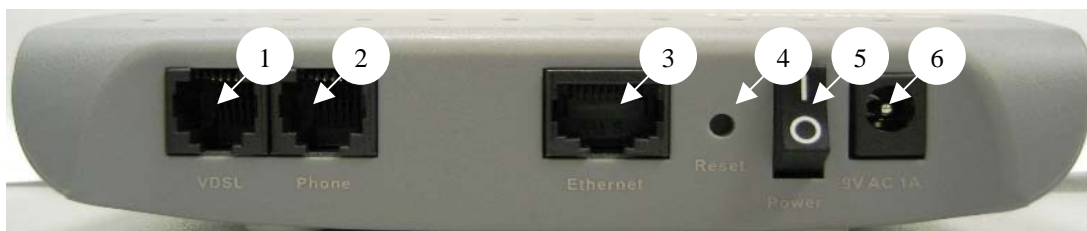

Rear connections	Description
1. VDSL	VDSL port, connecting to the HGC socket/splitter
2. Phone	Suspended (HGC will provide splitter to connect the RDEL service)
3. Ethernet	Ethernet port, connecting to a PC or HUB
4. Reset	Press and hold this button for 3 seconds to restore the default setting.
5. Power	Power switch
6. 9V AC 1A	Power input plug